


# CHEMATIC® 573

## DESCRIPTION

Chematic® 573 is a low foam highly concentrated liquid cleaner ideally suited for CIP, COP, spray and high-pressure cleaning of processing equipment found in pharmaceutical, nutraceutical, personal care and biopharmaceutical facilities. Chematic® 573 has been formulated for the removal of alkaline-soluble residues. Chematic® 573 is free rinsing.



## PHYSICAL PROPERTIES


<b>Physical Form</b>	Liquid	<b>Specific Gravity at 68°F</b>	1.345 – 1.375
<b>Appearance</b>	Clear; yellow to golden	<b>Foaming</b>	Low Foaming @ Use Temperature
<b>pH Use Solution</b>	>12	<b>Typical Storage Temperature</b>	40°F - 100°F

## SUBSTRATE COMPATIBILITY

- Product is safe on stainless steel, glass and most plastics and polymers.
- Product should be thoroughly rinsed off surfaces.
- Not recommended for soft metals.

*Precautionary Statement: Please refer to the current Material Safety Data Sheet.*

## AVAILABLE IN

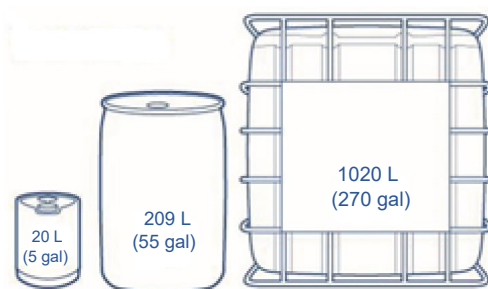


## FOR ADDITIONAL INFORMATION, CONTACT CHEMATIC AT:

630.410.7300  
chematic@dober.com  
[www.dober.com/chematic](http://www.dober.com/chematic)

## CLEANING VALIDATION SUPPORT

HPLC, TOC, and other methods are provided by Dober. Validation consulting support ranging from complete project management to sampling and swabbing methodologies and assistance is available from our validation consulting group.

## APPLICATIONS & USAGE

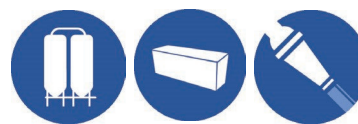

*CIP COP Spray*

Concentrations from 1% – 10% v/v  
Temperatures of 35°C – 80°C



*Manual*

Concentrations from 0.5% – 3% v/v  
Temperatures of 25°C – 50°C